

由 Autodesk 教育版产品制作

REV.	DESCRIPTION	DATE
A/1		

1	H
2	X
3	S
4	Y
5	L

产品逻辑图

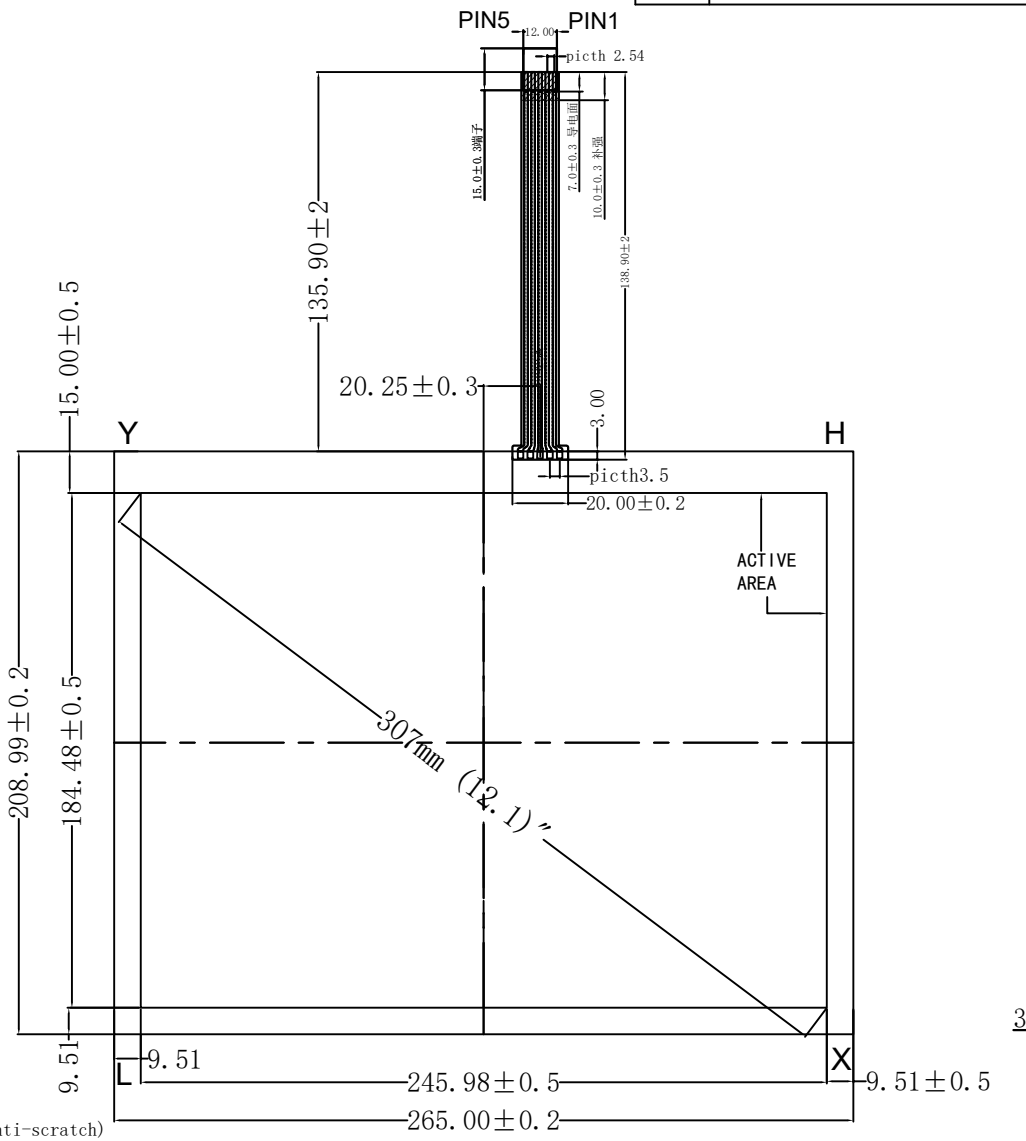

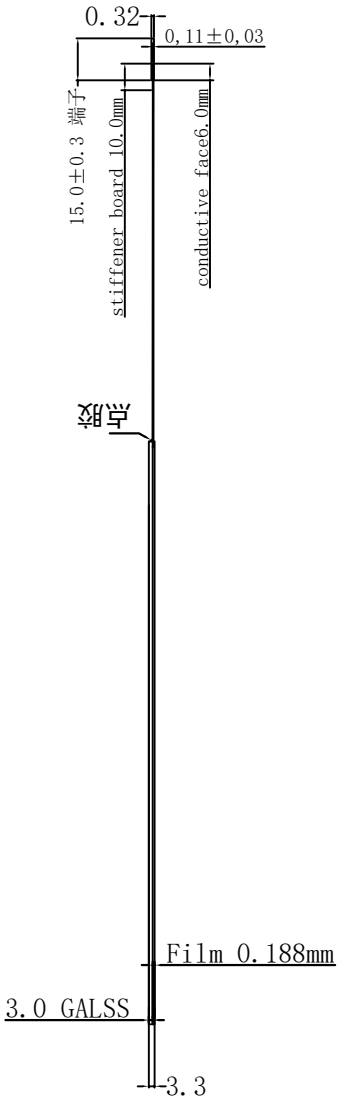

Technical parameters:

1. Structure: films+glass+FPC(Matte anti-scratch)
ITO Film type1: Anti-glare and anti-newton ring coating
2. Circuit level: DC5V 1mA
3. Surface hardess: ≤3H
4. Linear: ≤2.5%
5. Transparent rate: ≥76%
6. Operating pressure: 50-150g
7. Operational life span: ≥35,000,000 times
8. Operating temperature: -20℃~+70℃
9. Storage temperature: -30℃~+80℃
10. Unmarked tolerance: ±0.3mm
11. X:200-900Ω Y:200-900Ω
12. Meet ROHS environmental requirements

SCALE: 1 : 1 NOT TO SCALE		Reshine Display (HK) Technology Co.,Limited
PAGE: 1 OF 1		Tel:0755-29190292 Fax:0755-29190291
GENERAL TOL. 0.20mm	UNITS MM	
APPROVALS	DATE	MODEL NUMBER : RXF-12003-02R
APP Mychan	2016-06-15	CUSTOMER P/N :
CHK Amorll	2016-06-15	DATE: 2016-06-15
DWN Amorll	2016-06-15	PROJECTION

由 Autodesk 教育版产品制作